


P Series

Pipe/profile Shredder

- No pre cutting of pipe lengths necessary
- Process pipes up to 1200 mm diameter
- Automatic control giving virtually risk free operation
- Elimination of amperage peaks
- High throughput rates
- Allows feeding of bundles or nested pipes and profiles
- Large diameter rotor (up to 1500 mm)

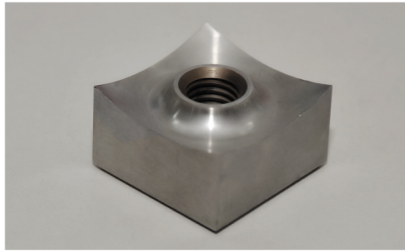

The shredders use concave ground square knives, producing high quality output. The cutters can be turned after a side is worn out.



The P shredders use very large diameter flat E-style rotors. The knives are fixed in special knife holders fitted in machined pockets.



The P pipe shredders are equipped with a special feeding trough sized to take pipes of up to 6 m length. A powerful hydraulic ram forces the pipes into the rotor.

General Description


The P shredder is the world's first single shaft shredder capable of handling large diameter pipes (up to 1200mm dia) without the need for pre cutting. Since their introduction they have become the per se standard for pipe shredding and are used world-wide by leading pipe manufacturers. More than 200 installations demonstrate our technological leadership in this industry and continuing innovation is based on market demands and customer feedback. Dependent on pipe diameter, the P rotor diameters and widths range from 800mm up to 1500 mm. The standard hopper accepts pipe lengths of up to 6 m. The combination of advanced controls, low rotor speed, and smooth hydraulics create a reliable and easy to use system.

Applications

The main focus of the P shredders is the shredding of large diameter pipes or bundles of smaller pipes and profiles made from HDPE, PP and PVC. The machines can also be used for recycling of other plastic materials such as large lumps, stacked wheelie bins and pallets. In combination with other Virtus size reduction equipment such as granulators and pulverizers we are able to provide a complete turn-key recycling solution.

P Series

Pipe/profile Shredder

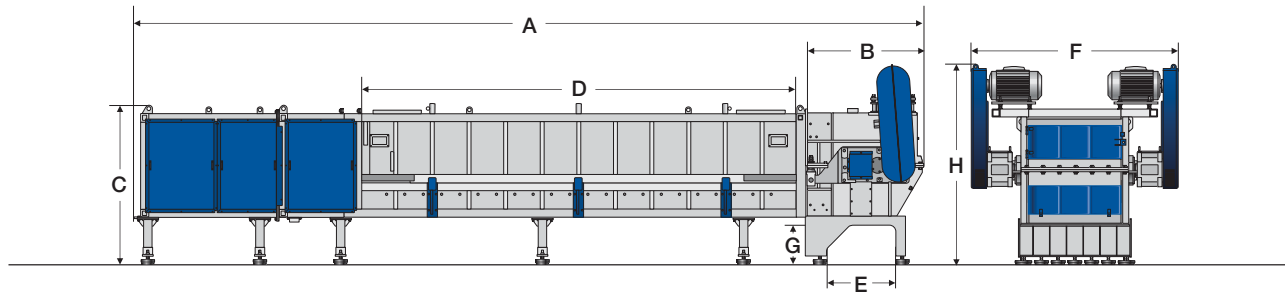

Technical Specifications and Dimensions

Model	800	1000	1500	2000
Rotor diameter (mm)	852	1033	1482	1650
Rotor width (mm)	850	1130	1410	2000
Rotor speed (rpm)	40	36	23	18
Drive capacity (kW)	2 x 37	2 x 45	2 x 55	2x75
Rotor knives (pcs)	60	81	136	264
Stator blades (pcs)	4	4	5	5
Ram feeder drive (kW)	11	15	15	18.5
Feeding trough volume (m ³)	2.7	6.7	12.6	16
Biggest pipe (mm)	3500 x Ø630	6500 x Ø850	6500 x Ø1200	6500xØ1800
Weight approx (kg)	11000	16000	25000	40000
A (mm)	7695	11940	12180	13800
B (mm)	1420	1580	1820	2380
C (mm)	1830	1965	2320	2920
D (mm)	3860	6720	6720	7200
E (mm)	975	1080	1080	1200
F (mm)	2545	2965	3250	3900
G (mm)	590	590	590	590
H (mm)	2565	2660	3160	4172

Virtus Equipment

9120 Centerlinks Commerce Dr., Unit 4
Fort Myers, FL 33912

239-219-1800
Sales@Virtus-Equipment.com

virtus-equipment.com

Virtus
Equipment

The Right Machine for Today's
Recycling Requirements